

ZMD310AT/CT  
**E650 Series 4**  
Technical data



Building on its tradition of industrial meters, Landis+Gyr has developed the E650 Series 4, the latest generation of ZMD300 meters. These meters feature a new hardware platform, combining modern technology with proven functions.

Date: 20.08.2021

File name: D000062000 E650 ZMD300xT Series 4 Technical data en b.docx

## Revision history

Version	Date	Comments
a	11.09.2017	Updated to Series 4 based on Series 3 document D000030104: Added maximum current data. Updated measurement accuracy. Added power consumption data. Added product safety information. Added extension board 421x. Deleted extension board 046x. Added input, output, extension board and additional power supply information.
b	20.08.2021	Added for indoor use only statement. Updated contact address.

Although the information contained within this document are presented in good faith and believed to be correct, Landis+Gyr (including its affiliates, agents and employees) disclaim any and all liability for any errors, inaccuracies or incompleteness relating to the product. Landis+Gyr makes no warranty, representation or guarantee regarding the performance, quality, durability or suitability of the products for any particular purpose. To the fullest extent permitted by law Landis+Gyr disclaims (1) any and all liability arising out of the use of the product, (2) any and all liability, including, but without limitation to, special, consequential and indirect damages and losses, and (3) any and all implied warranties, including, but without limitation to, fitness for purpose and merchantability.

The information contained in this document is strictly confidential and is intended for the addressee only. The unauthorised use, disclosure, copying, alteration or distribution of this document or the contents thereof is strictly prohibited and may be unlawful.

All product information are subject to change without notice.

## Design

E650 is the most proven platform for industrial and commercial meters with more than 2 million meters installed in over 80 countries.

E650 is the result of a century Landis+Gyr experience in metering field combined with high quality requirements.

## Range

E650 meters are the answer to a wide range of specific needs: from the reliable commercial meter to the complex measuring device with comprehensive additional functionality for sophisticated data acquisition and flexible tariff control at large industrial customers.

## Application

E650 direct connected meter offer the extensive voltage and current settings to connect to low voltage power distribution systems.

Covering most of the energy measurement and calculation use cases, E650 meters record active and reactive energy consumption in all three-phase four-wire and three-phase three-wire networks with powerful recording capabilities.

For instance, 32 energy rate registers can be combined in many different ways through 17 measured quantities, per quadrants or per phases. Those registers can be controlled by various sources (Control inputs, time switch or communication signals). 24 maximum demand rate registers and 2 lowest power factor registers with time stamp are available as well.

8 operating time registers settable with various control signals could be used in various situations from fraud tentatives up to operation follow up.

All registers can be stored in stored value profiles that allows the storage of 84 values for one year with a weekly reset.

One out of 2 load profiles available can be used to record energy registers, last average demand, average power factor for billing purposes in the case of dynamic tariffs, for instance, with an integration period programmable according to real needs.

E650 has various options to detect fraud attempts from energy calculation modes up to hardware options as DC – strong field detection or integrated terminal cover detection switch with time stamped records in the event logbook and optional local signalisation over a special LED or arrows on the LCD display.

In the Time of Use part the utility can define up to 12 different week/season tables, 100 special days and 12 day tables that are controlled by 16 time switch control signals. Programmable passive tables and emergency settings allow to manage unexpected or future situations without any additional workload.

A comprehensive logbook offers the possibility to record more than 70 different events with time stamp in a circular table of 500 events.

E650 can be used for network monitoring with key average measurement RMS recordings (U, I, P, Q, PF, THD).

Up to 26 channels can be recorded in a second load profile with a different integration period programmable from 1 minute up to 60 minutes which allows an excellent network monitoring.

Most power quality events (over-/undervoltages, power failures) are logged in the event logs with number of event, timestamp and phase allowing an easy calculation of SAIDI (System Average Interruption Duration Index) parameters. Up to 30 events for power failures can be recorded in a dedicated event log.

All information (stored data profile, load profiles, logbook, dedicated event log) are stored in non-volatile memory, which prevents any losses of critical data information.

Through a control table, it is possible to combine various signal sources to control signals with Boolean operators.

E650 is able to achieve simple automatism without any additional components.

Such control capabilities could be used not only to control registers but outputs locally or remotely as well.

E650 have extended digitals input and outputs (static and relays) from 3 inputs/2 outputs as basis combined with a variety of option boards offering different capabilities.

## Modular communication

Type AT/CT meters are equipped with modular communication units, which provide the right choice for the best data channel at all times. Plug & Play modules also offer you full freedom of choice for deployment of new communication technologies.

## Installation support

An indication of phase voltages, phase angles, rotating field and energy direction supports the installation.

## Summary of the main features

### ZMD300

<b>Measured quantities</b>	
Energy (quadrants, phases, direction, reverse stop)	17 <sup>1)</sup>
Summation channels (virtual or digital input)	2 <sup>1)</sup>
Losses (OLA, NLA)	2 <sup>1)</sup>
Losses (I <sup>2</sup> , U <sup>2</sup> )	2 <sup>1)</sup>
Active energy harmonic distortion	2 <sup>1)</sup>
Rotating field direction	•
<b>Energy and demand registers</b>	
Energy rates	32
Total energy	27
Demand rates	24
Power factor (combimeters only)	2
Last average and current demand	2x10
Memory depth per value (84 values selectable)	53
<b>Other registers</b>	
Operating time	8
Diagnostic registers	41
<b>Tariff module</b>	
Season tables	12
Week tables	12
Day tables	12
Special days (set 26 years ahead)	100
Time of use control signals	16
Emergency settings	•
Active/passive time tables	•
<b>Control table – 7 different control sources combinations to control 16 control signals</b>	
Communication and digital inputs, TOU, voltage, power factor, demand, current monitoring, status, missing voltages	•
<b>Load profiles (integration period from 1 up to 60 minutes)</b>	
Independent load profiles	2 (1 optional)
Maximum number of captured channels	26
<b>Data information storage (stored data profile, 2 load profiles, event log, dedicated event logs)</b>	
Non-volatile memory (Flash memory)	•

<sup>1)</sup> Value recordable in dedicated load profile from 1 up to 60 minutes (typical 15 minutes).

## ZMD300

<b>Instantaneous values</b>	
Voltage phase-neutral	● <sup>2)</sup>
Current	(I1, I2, I3, IN) <sup>2)</sup>
Frequency	● <sup>2)</sup>
Phase angles	● <sup>2)</sup>
Active power (+/-)	(P1, P2, P3, P total) <sup>2)</sup>
Reactive power (+/-)	(Q1, Q2, Q3, Q total) <sup>2)</sup>
Power factor	PF1, 2, 3, (PF total) <sup>1)</sup>
TTHD of active power	Sum <sup>2)</sup>
TTHD of phase voltage	(Phase 1, 2, 3) <sup>2)</sup>
TTHD of phase current	(Phase 1, 2, 3) <sup>2)</sup>
TTHD of voltage	Sum <sup>2)</sup>
TTHD of current	Sum <sup>2)</sup>
<b>Measurements monitoring with thresholds and records in event log</b>	
Over-/undervoltage phase-neutral	●
Overcurrent (phase and neutral)	●
<b>Event logs</b>	
Maximum number of entries time stamped (s)	1000
<b>Dedicated event log with snapshot</b>	
Maximum number of entries time stamped (s)	30
<b>SMS alarm capabilities</b>	
Alarm numbers of digital inputs	1 max.
Alarms on event (SMS)	●

<sup>1)</sup> Value recordable in dedicated load profile from 1 up to 60 minutes (typical 15 minutes).

<sup>2)</sup> Value recordable in another load profile from 1 up to 60 minutes (typical 1 minute).

## E650 Series 4 ZMD300AT/CT – Technical Data

### General

#### Voltage

Nominal voltage $U_n$	3 x 110/190 to 133/230 V 3 x 220/380 to 240/415 V
-----------------------	--

Voltage range	80 to 115%
---------------	------------

#### Frequency

Nominal frequency $f_n$	50 or 60 Hz
Tolerance	$\pm 2\%$

### IEC-specific data

#### Current

Base current $I_b$	selectable: 5, 10, 20 or 40 A
--------------------	-------------------------------

Maximum current $I_{max}$	
Metrological	selectable: 40, 60, 80, 100 or 120 A
Overload	120 A

Short-circuit current <10ms	5000 A
-----------------------------	--------

#### Measurement accuracy

ZMD310xT	
Active energy, to IEC 62053-21	class 1
Reactive energy, to IEC 62053-24	class 1

#### Measurement behaviour

Starting current	
According to IEC	0.4% $I_b$
Typical	0.3% $I_b$
The start-up of the meter is controlled by the starting power and not by the starting current.	

Starting power in M-circuit	single-phase
Nominal voltage x starting current	

### MID-specific data

#### Current (for class B)

Minimum current $I_{min}$	0.25, 0.5, 0.75, 1.0 A
---------------------------	------------------------

Transitional current $I_{tr}$	0.5, 1.0, 1.5, 2.0 A
-------------------------------	----------------------

Maximum current $I_{max}$	60, 80, 100, 120 A
---------------------------	--------------------

Measurement accuracy	to EN 50470-3
ZMD310xT	class B

#### Measurement behaviour

Starting current $I_{st}$	
Class B: $I_{st}$	0.02, 0.04, 0.06, 0.08 A

### General

#### Operating behaviour

Voltage failure (power-down)	
Bridging time	0.5 s
Data storage	after another 0.2 s
Switch off	after approx. 2.5 s

#### Voltage restoration (power-up)

Function standby 3 phases	after 2 s
Function standby 1 phase	after 5 s
Detection of energy direction and phase voltage	after 2 to 3 s

#### Power consumption

Power consumption per phase in voltage circuit	
Without communication unit, without auxiliary supply	
3 x 110/190 to 133/230 V	0.5 W 1.0 VA
3 x 220/380 to 240/415 V	0.7 W 1.7 VA

#### Power consumption per phase in voltage circuit

With communication unit, without auxiliary supply	
3 x 110/190 to 133/230 V	1.8 W 3.5 VA
3 x 220/380 to 240/415 V	1.9 W 4.1 VA

#### Power consumption per phase in current circuit

Phase current	10 A
Active power (typical)	0.03 W

#### Environmental influences

Temperature range	to IEC 62052-11
Metrological	-40 °C to +70 °C
Storage	-40 °C to +85 °C

#### Temperature coefficient

Range	-40 °C to +70 °C
Average value (typical)	$\pm 0.012\%$ per K
at $\cos\varphi=1$ (from 0.05 $I_b$ to $I_{max}$ )	$\pm 0.02\%$ per K
at $\cos\varphi=0.5$ (from 0.1 $I_b$ to $I_{max}$ )	$\pm 0.03\%$ per K

Ingress protection	to IEC 60529
	IP51 (without breakouts)

This meter is intended for indoor use only.

## Electromagnetic compatibility

Electrostatic discharges	to IEC 61000-4-2
Air discharge	15 kV
Contact discharge	8 kV

Electromagnetic RF fields	to IEC 61000-4-3
80 MHz to 2 GHz	10 and 30 V/m

Radio interference suppression according to IEC/CISPR 22	class B
--	---------

Fast transient burst test	to IEC 61000-4-4
Current and voltage circuits under load according to IEC 62053-21/23	4 kV
Auxiliary circuits > 40 V	2 kV

Surge test	to IEC 61000-4-5
Current and voltage circuits	4 kV
Auxiliary circuits > 40 V	1 kV

Immunity to conducted disturbances IEC 61000-4-6	
150 kHz to 80 MHz	10 V

Immunity to conducted disturbances according to CENELEC TR 50579	2 to 150 kHz
--	--------------

## Insulation strength

Insulation strength	4 kV at 50 Hz during 1 min.
---------------------	-----------------------------

Impulse voltage 1.2/50 $\mu$ s	to IEC 62052-11
Current and voltage circuits	8 kV
Auxiliary circuits	6 kV

Protection class II	to IEC 62052-11	<input type="checkbox"/>
---------------------	-----------------	--------------------------

## Product safety

Normal environmental conditions	IEC 62052-31
Overvoltage category	III
Pollution degree	2
Max. operating altitude	2000 m
Utilisation category	UC3

## Calendar clock

Calendar type	Gregorian or Persian (Jalaali)
---------------	--------------------------------

Accuracy	< 5 ppm
----------	---------

Backup time (power reserve) meter	
With supercapacitor	> 20 days
Charging time for max. backup time	300 h
With battery (optional)	10 years
Battery type	CR-P2
Battery temperature range	-40 °C to +55 °C

## Display

Characteristics	
Type	LCD (liquid crystal display)
Digit size in value field	8 mm
Number of digits in value field	up to 8
Digit size in index field	6 mm
Number of digits in index field	up to 8

## Inputs (passive)

HLV, reinforced insulation by optocoupler	
Number on base meter	3
Number on extension board 420x	4
Number on extension board 240x	2
Control voltage $U_S$	100 to 240 V <sub>AC</sub>
Range	80 to 115 %
Input current	< 0.8 mA at 230 V <sub>AC</sub>

SELV, reinforced insulation by optocoupler	
Number on extension board 326x	3
Control voltage $U_S$	12 to 24 V <sub>DC</sub>
Range	80 to 115 %
Input current	< 1.5 mA at 24 V <sub>DC</sub>

## Inputs (active)

SELV, reinforced insulation by optocoupler	
Active inputs, external closing contact required for activation (no control voltage necessary)	
Number on extension board 421x	4
Open circuit voltage (contact open)	< 5 V
Short-circuit current (contact closed)	< 5 mA
Max. contact resistance	< 500 Ohm

## Outputs (solid-state relay)

HLV or SELV, reinforced insulation by solid-state relay	
Voltage	12 to 240 V <sub>AC/DC</sub>
Max. current for each output	100 mA <sub>RMS</sub>
Max. switching frequency (pulse length 20 ms)	25 Hz
Contact resistance (typical)	13–18 Ohm

Base meter	
Number	2
Max. current all outputs together	200 mA <sub>RMS</sub>
Derating above 45 °C ambient	0.8 mA / °C

Extension board 420x	
Number	2
Max. current all outputs together	200 mA <sub>RMS</sub>
Derating above 45 °C ambient	0.8 mA / °C

Extension board 240x	
Number	4
Max. current all outputs together	200 mA <sub>RMS</sub>
Derating above 45 °C ambient	0.8 mA / °C



**Extension board 060x**

Number	6
Max. current all outputs together	200 mA <sub>RMS</sub>
Derating above 45 °C ambient	0.8 mA / °C

**Extension board 045x**

Number	4
Max. current all outputs together	200 mA <sub>RMS</sub>
Derating above 45 °C ambient	0.8 mA / °C

**Extension board 047x**

Number	4
Max. current all outputs together	200 mA <sub>RMS</sub>
Derating above 45 °C ambient	0.8 mA / °C

**Mechanical relay**

HLV, reinforced insulation, intended to control auxiliary devices

Number on extension board 326x	2
Number on extension board 421x	2
Max. voltage	250 V <sub>AC</sub>
Max. current for each relay	8 A
Max. current all relays together	8 A
Max. operations with $\cos\varphi \sim 1$	100 000
Contact resistance (typical)	10 mOhm
Withstand across open contact	1000 V <sub>AC</sub>
Withstand between contacts	1500 V <sub>AC</sub>

**Outputs (optical)**

Optical test outputs	active and reactive energy
Type	red LED
Number	2
Meter constant	selectable

**Communication interface**

Optical interface	to IEC 62056-21
Type	serial, asynchronous, half-duplex
Max. transmission rate	9600 bps
Protocols	IEC 62056-21 and DLMS

**Communication units**

Exchangeable communication units for various applications.

**Additional power supply (optional)****On extension board 045x**

HLV, reinforced insulation	
Nominal voltage range	100 to 240 V <sub>AC/DC</sub>
Tolerance	80 to 115% U <sub>n</sub>
Frequency	50 or 60 Hz

**VIN = 80 V**

Max. power consumption <sup>1)</sup>	5.6 W / 8.4 VA
Max. current	105 mA

**VIN = 276 V**

Max. power consumption <sup>1)</sup>	5.6 W / 12.4 VA
Max. current	45 mA

**On extension board 047x**

SELV, reinforced insulation	
Nominal voltage range	12 to 48 V <sub>DC</sub>
Tolerance	80 to 115% U <sub>n</sub>
Max. power consumption <sup>1)</sup>	5.2 W
Max. current (V <sub>IN</sub> = 9.6 V)	530 mA

**On extension board 326x**

SELV, reinforced insulation	
Nominal voltage range	12 to 24 V <sub>DC</sub>
Tolerance	80 to 115% U <sub>n</sub>
Max. power consumption <sup>1)</sup>	5.2 W
Max. current (V <sub>IN</sub> = 9.6 V)	530 mA

<sup>1)</sup> Power consumption without mains supply. If auxiliary and mains supply are available, the consumption is shared arbitrarily.

**Weight and dimensions**

Weight	approx. 1.5 kg
--------	----------------

**External dimensions**

Width	177 mm
Height (with short terminal cover)	244 mm
Height (with standard terminal cover)	281.5 mm
Height (with extended hook)	305.5 mm
Depth	75 mm

**Suspension triangle**

Height (with extended hook)	230 mm
Height (suspension eyelet open)	206 mm
Height (suspension eyelet covered)	190 mm
Width	150 mm

**Terminal cover**

Short	no free space
Standard (opaque, transparent)	40 mm free space
Long (opaque, transparent)	60 mm free space
GSM	60 mm free space
ZxB type 80 mm	80 mm free space
ZxB type 110 mm	110 mm free space
ADP2 adapter	

**Housing material**

Polycarbonate, partly glass-fibre reinforced

**Environmental protection**

RoHS compliant design



## Connections


### Phase connections

Type	screw type terminals	
Diameter for $I_{max} \leq 80$ A		8.5 mm
Diameter for $I_{max} > 80$ A		9.5 mm
Min. conductor cross-section		10 mm <sup>2</sup>
Max. cross-section cable	35 mm <sup>2</sup> (up to 120 A)	
Max. cross-section strand	25 mm <sup>2</sup> (up to 80 A)	
Screw head	Pozidriv Combi No. 2	
Screw dimensions	M6 x 14	
Screw head diameter	$\leq 6.6$ mm	
Tightening torque (min...max)	3...5 Nm	


### Other connections

Type	screwless spring-type terminal
Max. current of voltage outputs	1 A


### Meter dimensions (standard terminal cover)

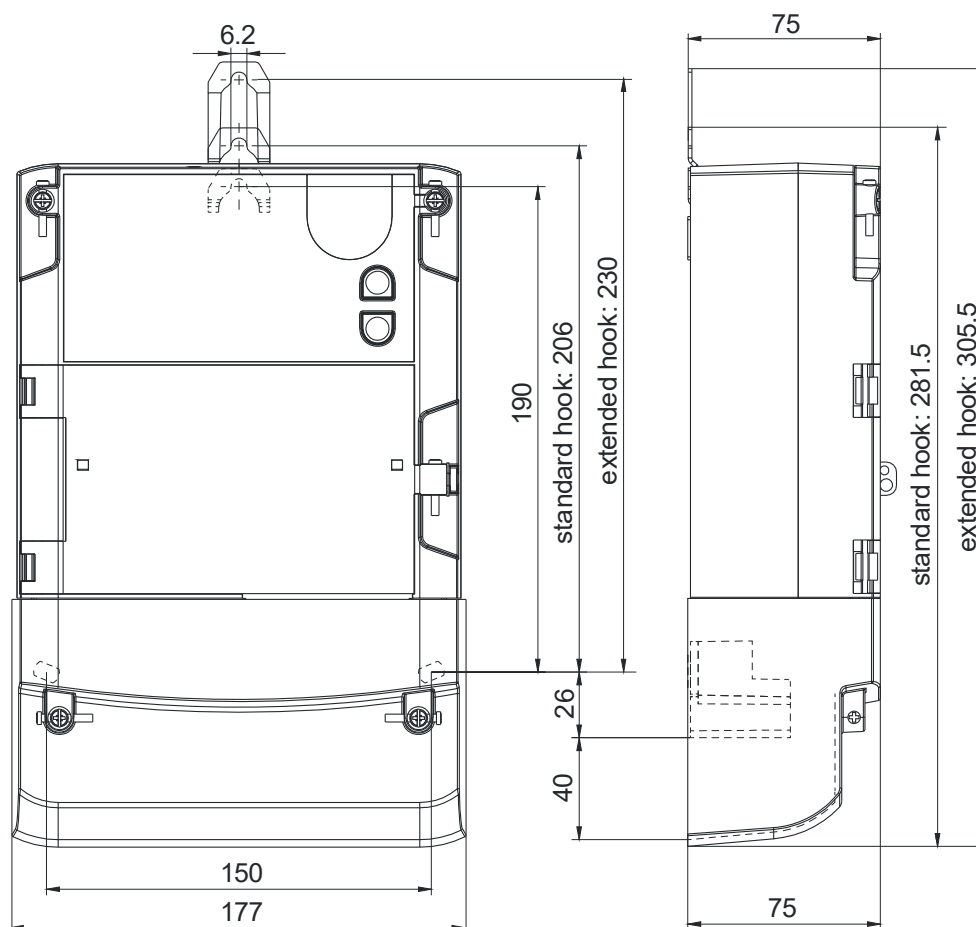

Terminal dimensions

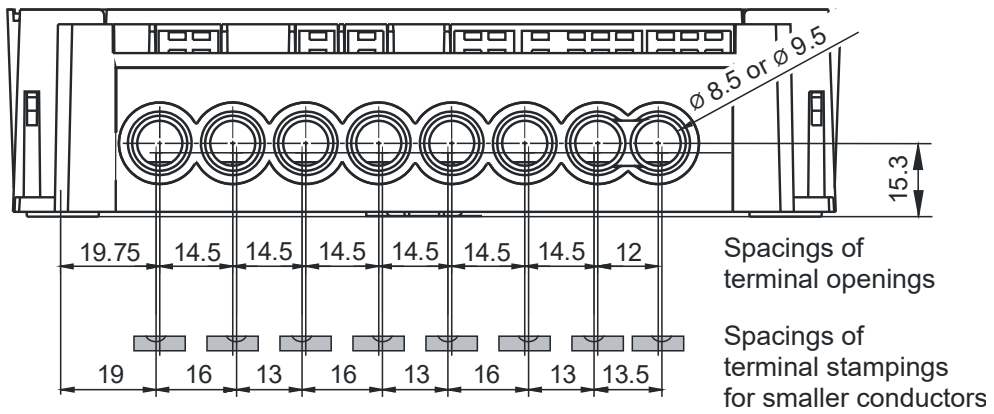

Terminal layout

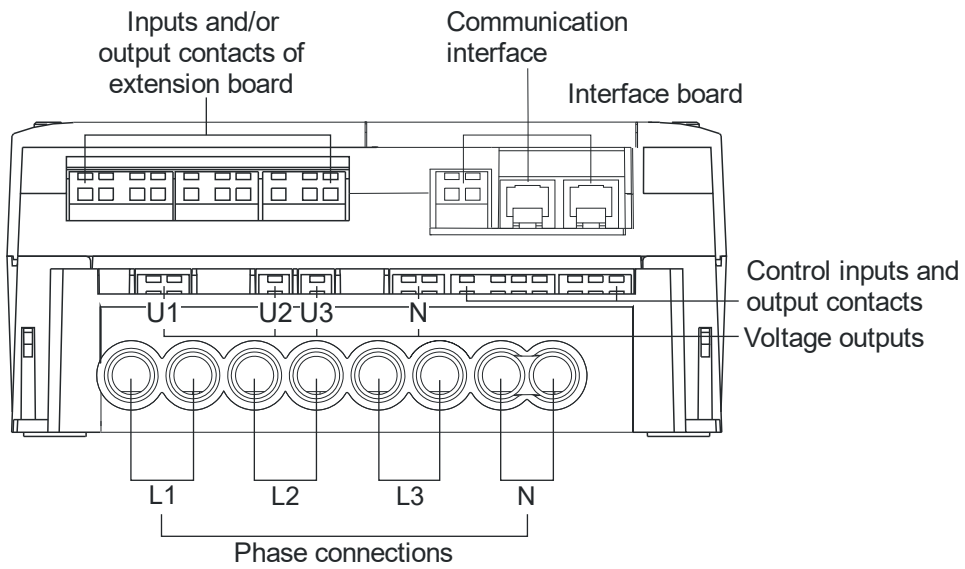

Type designation	ZMD	3	10	C	T	44	4207	S4
<b>Network type</b>	_____							
ZMD	3-phase 4-wire network (M-circuit)							
<b>Connection type</b>	_____							
3	Direct connection							
<b>Accuracy class</b>	_____							
10	Active energy class 1 (IEC), B (MID)							
<b>Measured quantities</b>	_____							
C	Active and reactive energy							
A	Active energy							
<b>Construction</b>	_____							
T	With exchangeable communication units							
<b>Tariffication</b>	_____							
21	Energy rates, external rate control via control inputs							
24	Energy rates, internal rate control via time switch (additionally possible via control inputs)							
41	Energy and demand rates, external rate control via control inputs							
44	Energy and demand rates, internal rate control via time switch (additionally possible via control inputs)							
	All versions with 3 control inputs and 2 output contacts							
<b>Additional functions</b>	_____							
000x	No extension board							
060x	6 outputs							
240x	2 control inputs, 4 outputs							
420x	4 control inputs, 2 outputs							
421x	4 active inputs, 2 relay outputs 8A							
326x	3 control inputs, 2 relay outputs, auxiliary power supply 12 to 24 V <sub>DC</sub>							
045x	4 outputs, auxiliary power supply 100 to 240 V <sub>AC</sub> /V <sub>DC</sub>							
047x	4 outputs, auxiliary power supply 12 to 48 V <sub>DC</sub>							
xxx0	No additional functions							
xxx2	DC magnet detection							
xxx7	Load profile							
xxx9	DC magnet detection and load profile (integrated terminal cover switch option only available in this configuration)							
<b>Series 4</b>	_____							

**Contact:**

Landis+Gyr AG  
Alte Steinhäuserstrasse 18  
CH-6330 Cham  
Switzerland  
Phone: +41 41 935 6000  
[www.landisgyr.com](http://www.landisgyr.com)

Landis+  
Gyr  
manage energy better