

E360-AD2D Pxx.xx.xx

E360 Series 1 LTE 1-phase

Technical data



E360 LTE is the latest state-of-the-art residential smart meter from Landis+Gyr. It provides flexible local and remote communications for the IoT (Internet of Things) world. E360 is a future-proof instrument with powerful e-metering, network monitoring, multi-energy and consumer information functionalities.

Date: 30.08.2019
 D000065103 b en 1

© Landis+Gyr

Revision history

Version	Date	Comments
a.01	13.09.2018	First draft.
a.02	02.10.2018	Updated after R&D validation.
a.03	26.10.2018	Updated by the documentation team.
a.04	31.10.2018	Updated by the documentation team.
a.05	16.11.2018	Preliminary draft. Updated power consumption data and updated weight.
a.06	10.12.2018	Preliminary draft. Updated cover art, added supercapacitor charge time, updated material of terminals, added terminal tightening torque, updated dimensions, added back dimensions and updated type designation.
a.07	16.01.2019	Preliminary draft. Updated cover art, introduction, solid-state auxiliary control switch, extended operating voltage range, nominal frequency, maximum current, starting current, voltage failure, voltage restoration, ingress protection, impulse voltage, optical pulse output, application protocol, minimum conductor cross-section, SIM card size, type of screw, screw dimensions, wireless M-Bus communication modes, SCS current range and dimension drawings. Added MID measurement accuracy and suspension triangle measurements. Deleted ferrules, rate control input (optional) and wired M-Bus (optional).
a.08	25.02.2019	Preliminary draft. Added maximum overload current, 2-pole supply control switch and operation temperature range for last gasp. Updated auxiliary load control switch name, voltage failure description, and radio interference suppression standard.
a.09	27.03.2019	Preliminary draft. Added maximum tightening torque. Updated impulse voltage, minimum conductor cross-section and optical interface transmission speed.
a.10	10.05.2019	Preliminary draft. Added SAR value. Updated supply control switch options.
a	21.05.2019	First edition. Updated operation modes, IEC starting currents and maximum tightening torque. Added power reserve ambient temperature.
b	30.08.2019	Updated impulse voltages. Added contact resistance burden for auxiliary control switch and auxiliary load control switch. Added supply control switch rated voltage. Added 1 x 5 A auxiliary load control switch and chip SIM options.

Although the information contained within this document is provided in good faith, Landis+Gyr (including its affiliates, agents and employees) repudiates any and all liability for any errors, inaccuracies or incompleteness relating to the product. Landis+Gyr provides no warranty, representation or guarantee with regard to the performance, quality, lifetime or suitability of the products for any particular purpose. To the fullest extent permitted by law, Landis+Gyr disclaims (1) any and all liability arising out of or in connection with the use of the product, and (2) any and all liability, including, but without limitation, special, consequential and indirect damages and losses, and (3) any and all implied warranties, including, but without limitation to, fitness for purpose and merchantability.

All images, drawings, diagrams, technical descriptions, information and specifications contained in this document (the "Content") constitute the intellectual property of Landis+Gyr. All rights are reserved. Any distribution, duplication, amendment, and any other kind of use of the Content or its reproduction in whole or in part is only permitted with the prior written consent of Landis+Gyr. The Content is strictly confidential and intended solely for the addressee.

All product information may be changed at any time without prior notification.

Direct-connected E360 residential smart meters record active and reactive energy consumption in all single-phase, two-wire (E360-AD) networks.

Flexible communication

The E360 is able to communicate in an LTE Cat NB1 network as well as in an LTE Cat M1 network. For optimal LTE connectivity it can be equipped with an internal or (optional) external antenna.

Multitude of features

A large, backlit LCD display is easy to read day or night. There is support for multi-energy devices via wireless M-Bus (optional), and a Consumer Information Interface (CII) enables easy and secure transfer of meter data to end-consumer applications. The E360 also comes with an integrated supply control switch, an auxiliary control switch (optional) and an auxiliary load control switch (optional).

E360 Series 1 LTE 1-phase – Technical data

General

Functions

Measurement:

- Combined bi-directional measurement
- Single-phase/two-wire (E360-AD)

Integrated LTE remote communications:

- Two-way LTE Cat NB1/M1 communication to the head-end system
- Last gasp, which allows the meter to push an alarm at power-down

M-Bus interface:

- Wireless M-Bus interface (optional) supports up to 4 multi-energy devices (e.g. gas, water and district heating)

Outputs:

- Optical interface for local reading, configuration and parameterisation
- HAN P1 (RJ-12) consumer information interface (CII)
- 0 to 2 auxiliary control switches/auxiliary load control switches (potential-free outputs)

Output 1: 100 mA solid-state auxiliary control switch (optional)

Output 2: 5 A potential-free mechanical auxiliary load control switch (optional)

Control buttons:

- Display button
- Reset button (sealable)
- Supply control button

Backlit LCD display:

- 14-segment clear text display
- 8 digits for register value display
- Phase, OBIS codes, energy direction, no-load mode, critical error, multi-energy units of measure, currency, active tariff, communication status and supply control switch state indicators on display
- Consumer messages (rolling display)

Internal supply control switch:

- Disconnection of energy

- Pre-defined operation modes
- Can be controlled remotely from the AMM system, manually with a push-button or via local communication interfaces

Voltage and frequency

Nominal voltage U_n

E360-AD 230 VAC

Maximum voltage U_{max}

long-term overvoltage 4h

440 VAC (limited time)

Extended operating voltage range

80% - 120% U_n

Nominal frequency f_n

50 Hz (value \pm 5%)

IEC-specific data

Current

Basic current I_b

5 A

Maximum current I_{max}

Metrological

80 A

Maximum overload current I_{ovl}

80 A

Short-circuit \leq 10 ms

30 x I_{max}

Measurement accuracy

E360-AD

Active energy, according to IEC 62053-21

class 1

Reactive energy, according to IEC 62053-23

class 2

Measurement behaviour

Starting current

Active energy, according to IEC 62053-21	$\leq 0.4\% I_b$
Reactive energy, according to IEC 62053-23	$\leq 0.5\% I_b$

MID-specific data**Current****Reference current I_{ref}**

5 A

Minimum current I_{min}

0.25 A

Maximum current I_{max}

80 A

Maximum overload current I_{ovl}

80 A

Measurement accuracy**E360-AD**

Active energy, according to EN 50470-1/50470-3 class B

Measurement behaviour**Starting current I_{st}** 0.4 % of I_{ref} (≤ 20 mA)**General data****Operating behaviour****Voltage failure (power-down)**Voltage (for $U_n=230/230$ V)
170 V**Voltage restoration (power-up)**

Function standby	< 5 s
Detection of energy direction / phase voltage	0.5 s
Voltage	> 184 V

Power consumption**Total power consumption of the meter**

Base meter without communication:

Active power at U_n (typical)	< 0.65 W
Apparent power at U_n (typical)	< 2.05 VA

Base meter while communicating over LTE:

Active power at U_n (typical)	< 1.7 W
Apparent power at U_n (typical)	< 4.35 VA

Environmental influences**Temperature range**

Operation (meter)	-40 °C to +70 °C
Operation (LCD display)	-25 °C to +70 °C
Operation (last gasp)	-40 °C to +60 °C
Storage	-40 °C to +80 °C

Temperature coefficient

Range	-40 °C to +70 °C
Average value (typical)	$\pm 0.01\%$ per K
At $\cos\phi = 1$ (from $0.1 I_b$ to I_{max})	$\pm 0.05\%$ per K
At $\cos\phi = 0.5$ (from $0.2 I_b$ to I_{max})	$\pm 0.07\%$ per K

Maximum operating altitude

2000 m

Ingress protection

according to IEC 60529

IP54 (without breakouts)

This meter is intended for indoor use only.

Electromagnetic compatibility**Electrostatic discharges**

according to IEC 61000-4-2

Contact discharge	8 kV
Air discharge	15 kV

Electromagnetic RF fields

according to IEC 61000-4-3

80 MHz to 2 GHz	10 and 30 V/m
-----------------	---------------

Radio interference suppression according to IEC/CISPR 32

class B

Radio Equipment Directive (RED)

2014/53/EU

compliant

Fast transient burst test

according to IEC 61000-4-4

Current and voltage circuits under load, according to IEC 62053-21	4 kV
Auxiliary circuits > 40 V	1 kV

Surge test

according to IEC 61000-4-5

Current and voltage circuits	4 kV
Auxiliary circuits > 40 V	1 kV

Insulation strength**Insulation strength**

4 kV at 50 Hz during 1 minute

Impulse voltage 1.2/50 μ s	
Main circuits, according to IEC 62052-31	6 kV
Auxiliary circuits, according to IEC 62052-31	4 kV
According to SP 1618	12 kV

Protective class according to IEC 62052-11 and IEC 62052-31

class II 

Calendar clock

Normal operation	
Accuracy (at +23 °C)	0.5 s/day
(EN 62054-21 requirement for time switches: 0.5 s/day)	

Reserve running	
Accuracy (at +23 °C)	< 1 s/day
(EN 62054-21 requirement for time switches: 1.0 s/day)	

Typical back-up time (power reserve)	
With supercapacitor (at +23 °C)	7 days

Supercapacitor charge time	
To full charge	72 hours

Display

Characteristics	
Type	14-segment clear text LCD
Back light for poor lighting conditions	
Digit size value field	10 mm
Number of digits value field	8
Digit size code field	8 mm
Number of digits code field	6

Outputs:

Optical pulse output		active and reactive energy	
Type	red LED		
Pulse length	10 ms		
Pulse constant	1000 imp/kWh class B (active)		
	1000 imp/kvarh class 2 (reactive)		

Consumer accessible HAN compartment with serial interface

P1 output (according to DSMR5) with power delivery of 5 V, 250 mA
Application protocol: DSMR5 P1

Output 1 (1st terminal block from left) (optional)	
Type	solid-state auxiliary control switch

Output 1 (1st terminal block from left) (optional)	
Nominal voltage	230 VAC
Maximum voltage	276 VAC
Switching current	100 mA
Burden (contact resistance) (typical))	27 Ohm

Output 2 (2nd terminal block from left) (optional)	
Type	mechanical auxiliary load control switch, non-latching
Nominal voltage	230 VAC
Maximum voltage	276 VAC
Switching current	5 A
Burden (contact resistance) (typical))	10 mOhm

Phase connections	
Material of terminal	steel
Type (two options)	(1) single-screw cage-clamp terminal or (2) two-screw terminal
Diameter	9.5 mm
Minimum conductor cross-section	4.0 mm ²
Maximum conductor cross-section	35.0 mm ²
Rotation test (IEC 60999-1 test 9.4)	
Pull test (IEC 60999-1 test 9.5)	
Type of screw:	zinc-plated steel Pozidriv 2 screw with slot
Screw dimensions	M6 x 16
Maximum screw-head diameter	7 mm

Cross-slot	type Z, size 2 (ISO 4757-1983)
Slot width	0.8 mm
Slot length	minimum 6 mm
Minimum tightening torque	3.0 Nm
Maximum tightening torque	4.5 Nm

Communication interfaces

Optical interface	
Type	bi-directional serial interface
Protocol	according IEC 62056-21
Maximum transmission speed	9,600 bps

LTE interface

Integrated LTE Cat NB1 and Cat M1 modem according to 3GPP LTE release 13

Supported LTE Bands
B3 (1800 MHz), B8 (900 MHz), B20 (800 MHz)

Maximum RF output power on all bands
23 dBm

Data transmission speed and latency depend on MCL (Maximum Coupling Loss)

LTE Cat NB1
max. peak downlink speed: 250 kb/s
max. peak uplink speed (single/multi-tone): 20/250 kb/s

LTE Cat M1
max. peak downlink speed: 1 Mb/s
max. peak uplink speed: 1 Mb/s

Packet-oriented communication service

- IPv4 protocol
- TCP protocol
- Dynamic and fixed IP address (depending on SIM card assignment)

SIM card holder for a mini-SIM card

Internal antenna

External antenna (optional) with a 50 Ohm MCX connector

Wireless M-Bus interface (optional)

Frequency
868 MHz according to EN 13757-4

Communication modes
T1/T2, C1/C2

Range up to 300 metres (with internal antenna)

Readout frequency
maximum every 8 seconds (impact on reserve energy)

Application layer protocol
EN 13757-3 and OMS 4.03

Internal supply control switch

Rated voltage U_n
230 VAC

Contact data
IEC 62052-31
full current range up to 80 A

Poles
1-pole (2-pole optional)

Maximum switching power
25 kVA

General load switching capacity
UC3 according to EN 62052-31

Safety requirements

Electrical safety according to EN 62052-31

RF Exposure / SAR value

The antenna(s) must be installed such that a minimum separation distance of 0.085 metres is maintained between the radiator (antenna) and all people and domestic animals at all times.

Environmental compatibility

The device conforms to the European directives WEEE (2012/19/EC), ROHS2 (2011/65/EC) and REACH (2006/1907/EC).

Material**Case**

Material
glass-filled polycarbonate

Flame retardant and self-extinguishing class
V0 according to IEC 60695-11-10

High temperature deflection, UV stabilised and can withstand applicable environmental tests defined in IEC 60068.

Weight and dimensions**Weight**


approximately 1.15 kg


External dimensions

Width	135 mm
Height (with terminal cover)	228 mm
Depth	80 mm


Suspension triangle

Height (with open mounting)	179 mm
Height (with covered mounting)	155 mm
Width	105 mm

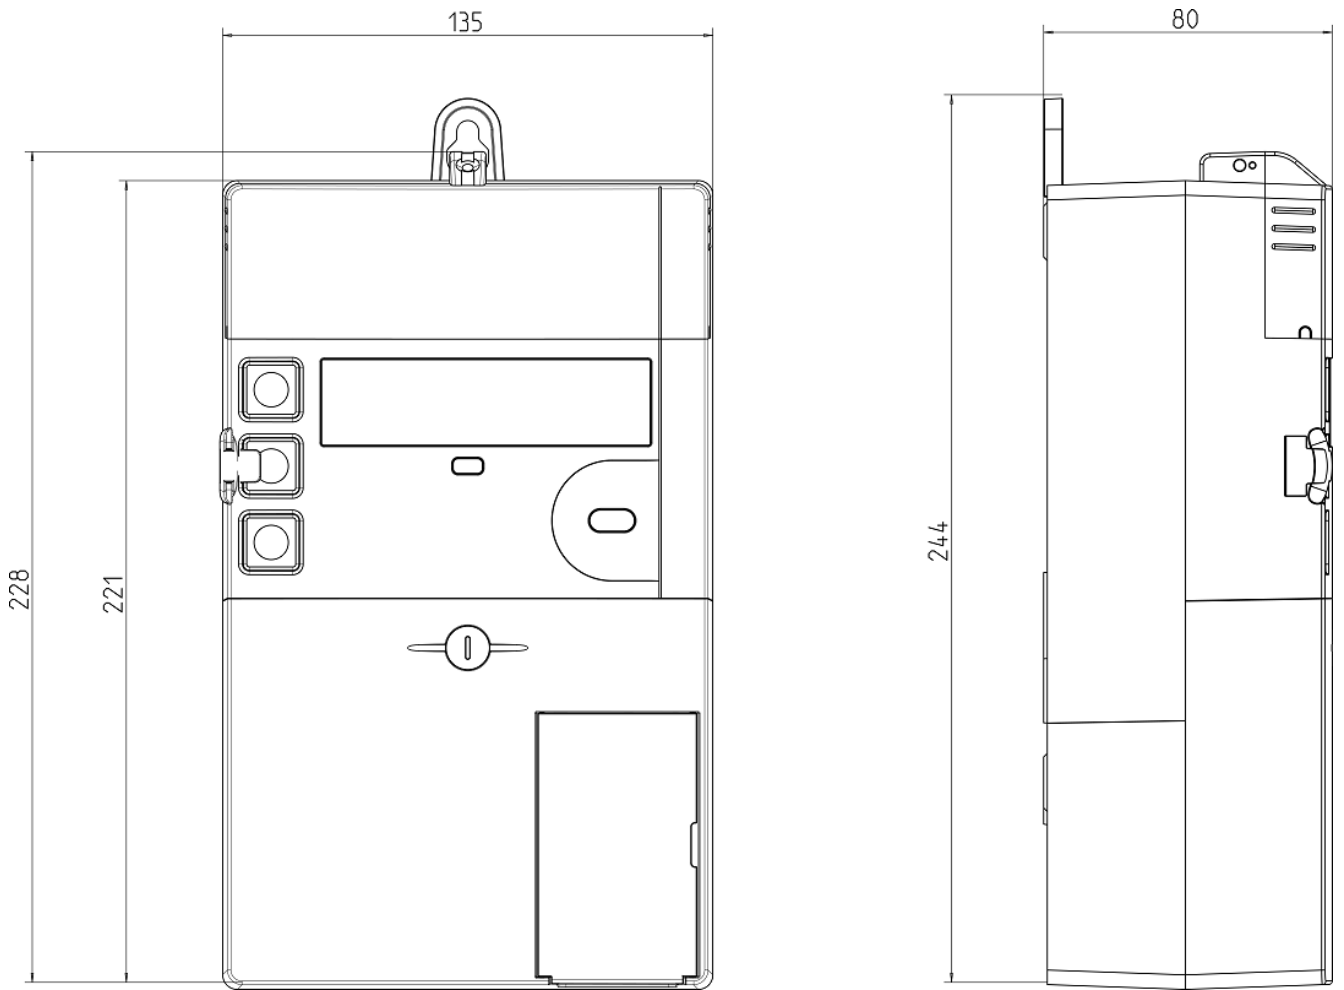Dimensions with terminal cover

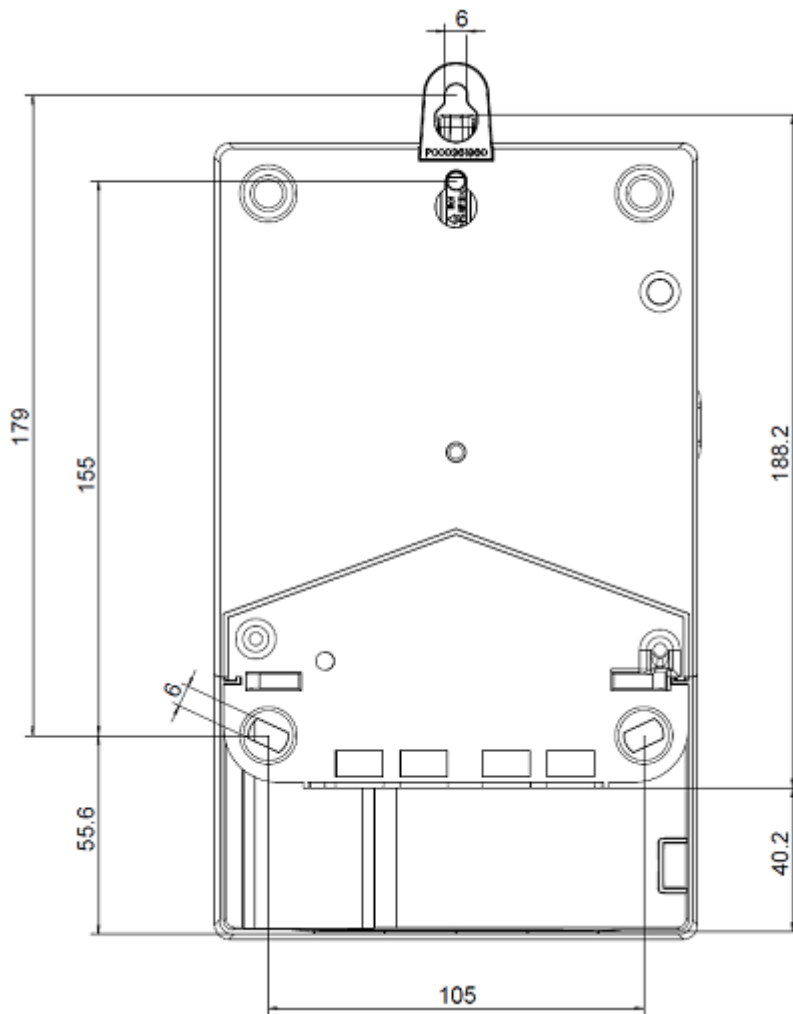

Dimensions of connection terminals

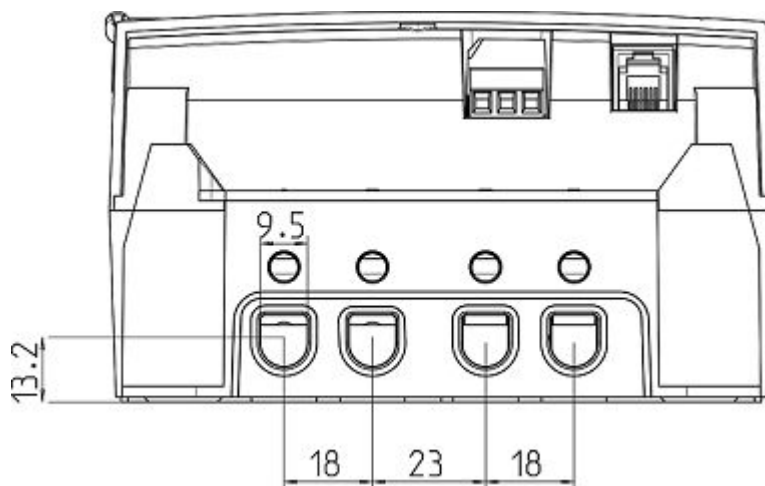

Type designation

The exact configuration of E360 meters is expressed in a type designation printed on the device faceplate. The type designation can also be read by the metering system.

Example	E360	-A	D	2	D.	C	3	D.	B	2-	L1	P1	WL	D1	0	3	.1	1	0	S1
Brand name	E360 Residential smart meter																			
Product family	A																			
Network and mechanical standard	D 1-phase, 2-wire (DIN)																			
Maximum current	2 80 A																			
Voltage level	D 220-240 V																			
Measurement types	A Active, no reactive / apparent, vector B Active, no reactive / apparent, arithmetic C Active and reactive / apparent, vector D Active and reactive / apparent, arithmetic																			
Measurement modes	3 Active plus and minus																			
Additional quantities	D Energy, demand and profiles																			
Accuracy active measurement	B Class B (MID)																			
Accuracy reactive measurement	0 No reactive measurement 2 Class 2 (IEC)																			
WAN communication	L1 LTE Cat NB1 and M1																			
HAN communication	P1 DSMR P1																			
Built-in extensions	W0 None WL Wireless M-Bus																			
Supply control switch	D0 No supply control switch D1 1-pole																			
Inputs	0 None																			
Outputs	0 None 1 1 x 5 A potential-free auxiliary load control switch, non-latching 3 1 x 100 mA solid-state auxiliary control switch; 1 x 5 A potential-free auxiliary load control switch, non-latching																			
Mains terminals	1 1-screw terminals 2 2-screw terminals																			
Options 1	0 None 1 Last gasp																			
Options 2	0 None 1 Neutral measurement 2 E.ON chip SIM																			
Hardware series	S1 Series 1																			

Order options

Only the following E360 1-phase meter variants can be ordered.

Basic variant containing:

- LTE Cat NB1/M1 modem
- Last gasp
- Supply control switch
- Powered P1 port

Type designation: **E360-AD2D.x3D.B2-L1 P1 W0 D1 00.110 S1**

x = Measurement types can be freely chosen, see type designation table.

Full variant containing:

- Basic variant
- Wireless M-Bus
- 1 x auxiliary control switch (100 mA)
- 1 x auxiliary load control switch (5 A)

Type designation: **E360-AD2D.x3D.B2-L1 P1 WL D1 03.110 S1**

x = Measurement types can be freely chosen, see type designation table.

PAGE INTENTIONALLY LEFT BLANK

Contact:

Landis+Gyr AG

Theilerstrasse 1

CH-6301 Zug

Switzerland

Phone: +41 41 935 6000

www.landisgyr.com