


Communication module

# E66C

## Technical data

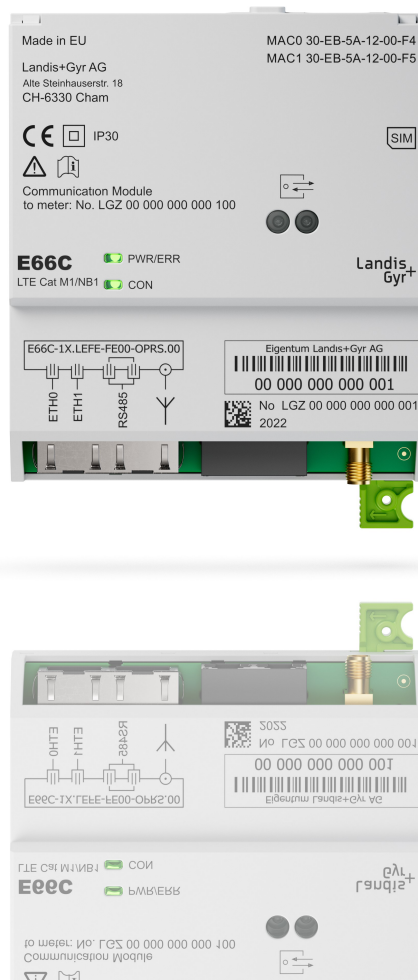

E66C communication modules provide LTE Cat M1/(NB1), LTE Cat 1/(GPRS), RS-485 and Ethernet communication between the E660 device family and metering systems.

## Revision history

| Version | Date       | Comments   |
|---------|------------|--|
| a       | 03.08.2020 | First edition.   |
| b       | 13.08.2020 | Added maximum transmit power. Updated typical application diagram. |
| c       | 29.10.2020 | Updated RS-485 characteristics.                                    |
| d       | 31.01.2022 | Updated product name and weight.                                   |
| e       | 01.11.2022 | Series 2. Added Cat 1 variant.                                     |

---

Although the information contained within this document is provided in good faith, Landis+Gyr (including its affiliates, agents and employees) repudiates any and all liability for any errors, inaccuracies or incompleteness relating to the product. Landis+Gyr provides no warranty, representation or guarantee with regard to the performance, quality, lifetime or suitability of the products for any particular purpose. To the fullest extent permitted by law, Landis+Gyr disclaims (1) any and all liability arising out of or in connection with the use of the product, and (2) any and all liability, including, but without limitation, special, consequential and indirect damages and losses, and (3) any and all implied warranties, including, but without limitation to, fitness for purpose and merchantability.

All images, drawings, diagrams, technical descriptions, information and specifications contained in this document (the "Content") constitute the intellectual property of Landis+Gyr. All rights are reserved. Any distribution, duplication, amendment, and any other kind of use of the Content or its reproduction in whole or in part is only permitted with the prior written consent of Landis+Gyr. The Content is strictly confidential and intended solely for the addressee.

All product information may be changed at any time without prior notification.

# E66C communication module – Technical data

| General   |                    |                   |                   |        | Processor and hardware description  |                                   |
|---|--------------------|-------------------|-------------------|--------|---|-----------------------------------|
| <b>Design</b>   |                    |                   |                   |        | Clock speed   | 600 MHz                           |
| <b>Product type options</b>   |                    |                   |                   |        | Core performance  | 828 DMIPS                         |
| Type  | LTE Cat 1/<br>GPRS | LTE Cat<br>M1/NB1 | 10/100<br>BASE-TX | RS-485 | DRAM capacity   | 256 Mbytes                        |
| E66C Cat M1   |                    | •                 | •                 | •      | FLASH capacity  | 8 Gbytes                          |
| E66C ETH  |                    |                   | •                 | •      | Encryption co-processor   | AES, 3DES                         |
| E66C Cat 1  | •                  |                   | •                 | •      | Overvoltage category with E660  | III <sup>1</sup>                  |
| <b>Supported service protocols</b>  |                    |                   |                   |        | Protection class  | IP30 <sup>2</sup>                 |
| <ul style="list-style-type: none"> <li>Maintenance interface:               <ul style="list-style-type: none"> <li>Based on RESTful web service</li> <li>Over the browser-based web interface</li> </ul> </li> <li>Forwarding and bridging is protocol independent, verification recommended</li> </ul>   |                    |                   |                   |        | <b>Power consumption</b>  |                                   |
| <b>Installation</b>   |                    |                   |                   |        | <b>Maximum active/apparent power</b>  |                                   |
| Directly in meter (E660)  |                    |                   |                   |        | 4.0 W/7.3 VA  |                                   |
| <b>Features</b>   |                    |                   |                   |        | <b>LTE Cat 1 and M1 modems (E66C Cat 1 and M1/NB1)</b>  |                                   |
| <ul style="list-style-type: none"> <li>EMC conformance for the combination of meter and modem for electrical metering equipment</li> <li>Up to five independent channels for meter access</li> <li>Configuration of E660 using the optical head with .MAP110 Service Tool</li> <li>Configuration using e.g. a browser-based web interface or any third-party tool supporting the RESTful web service</li> <li>Remotely updatable firmware in the main application and the LTE Cat 1 and M1 modems.</li> </ul> |                    |                   |                   |        | <b>Operating modes</b>  |                                   |
| <b>Configurable forwarding (virtual bus)</b>  |                    |                   |                   |        | Technology  | LTE Cat 1, LTE Cat M1/NB1 or GPRS |
| Interfaces:   |                    |                   |                   |        | SIM card 1.8/3 V  | field exchangeable                |
| <ul style="list-style-type: none"> <li>USB-based proprietary base meter interface</li> <li>DLMS/COSEM is the service protocol to the base meter</li> <li>TCP IP connection (Ethernet/LTE modem)</li> <li>Serial RS-485 connection</li> </ul>  |                    |                   |                   |        | Size  | mini-SIM (2FF)                    |
| <b>Processor and hardware description</b>   |                    |                   |                   |        | Frequency bands   | Cat M1/NB1    Cat 1 (4G)    GPRS  |
| Application processor   |                    |                   |                   |        | B1 (2100 MHz)   | •                                 |
| ARM Cortex-A5   |                    |                   |                   |        | B3 (1800 MHz)   | •    •    •                       |
|   |                    |                   |                   |        | B7 (2600 MHz)   | •                                 |
|   |                    |                   |                   |        | B8 (800 MHz)  | •    •    •                       |
|   |                    |                   |                   |        | B20 (800 MHz DD)  | •    •                            |
|   |                    |                   |                   |        | B28 (700 MHz APT)   | •                                 |
|   |                    |                   |                   |        | <b>Standards and approvals</b>  |                                   |
|   |                    |                   |                   |        | <b>Cat 1, Cat M1/NB1:</b>   |                                   |
|   |                    |                   |                   |        | Complies with the essential requirements of the Radio Equipment Directive 2014/53/EC.                         |                                   |
|   |                    |                   |                   |        | Effective use of spectrum RED Article 3.2   |                                   |
|   |                    |                   |                   |        | <ul style="list-style-type: none"> <li>ETSI EN 301 908-1 v11.1.1</li> </ul>                                   |                                   |
|   |                    |                   |                   |        | EMC RED Article 3.1b  |                                   |
|   |                    |                   |                   |        | <ul style="list-style-type: none"> <li>ETSI EN 301 908-1 v2.2.1</li> <li>ETSI EN 301 489-52 v1.1.1</li> </ul> |                                   |
|   |                    |                   |                   |        | Safety RED Article 3.1a   |                                   |
|   |                    |                   |                   |        | <ul style="list-style-type: none"> <li>EN 62368-1:2021</li> </ul>   |                                   |
|   |                    |                   |                   |        | <b>ETH:</b>   |                                   |
|   |                    |                   |                   |        | EMC   |                                   |

<sup>1</sup> In certain E660/E66C module variant combinations OVC IV categorisation is possible. Consult Product Management.

<sup>2</sup> When installed in its intended location inside an E660 the IP rating of the meter applies (IP54).

- EN 61326-1:2013

Safety

- EN 62368-1:2021

**Functions**

- Standardised communication interfaces
  - Supporting meter push capability
- Standardised and secure application layer interfaces and secure data storage
- Multi-stakeholder/multi-user concurrent access to base meter and other applications
- Legacy meter-room support over RS-485
- Ethernet meter-room with no degradation of functionality of LAN connected meters
- Communication media transformation (with port-forwarding)
  - Serial, TCP/IP and UDP/IP
- Communication protocol transformation (with applicable licenses) including:
  - IEC 62056 DLMS-COSEM (Client)
  - IEC 61158 Modbus (Client/Server)
  - IEC 60780-5-104 SCADA (Server)
- Grid Edge applications (with applicable licenses)
- Secure application and communication modem remote firmware upgrade

**LTE modem**



Maximum transmit power (conducted)

- Class 3 (23±2 dBm) for LTE-FDD
- Class E2 (26±3 dBm) for DCS1800 8-PSK
- Class E2 (27±3 dBm) for EGSM900 8-PSK
- Class 1 (30±2 dBm) for DCS1800
- Class 4 (33±2 dBm) for EGSM900



**Terminals**

**Terminal layout**

E66C Cat 1/GPRS, Cat M1/NB1

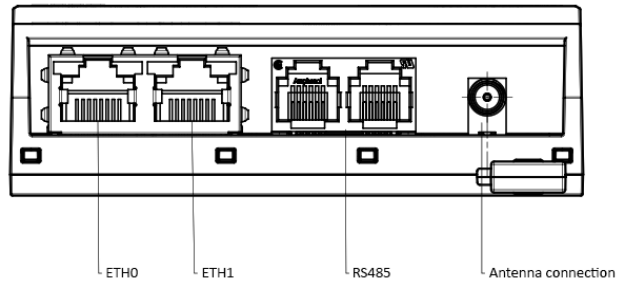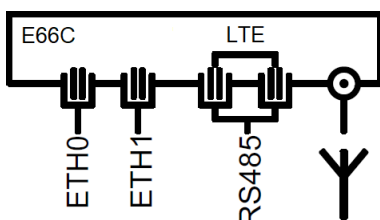

**E66C ETH**

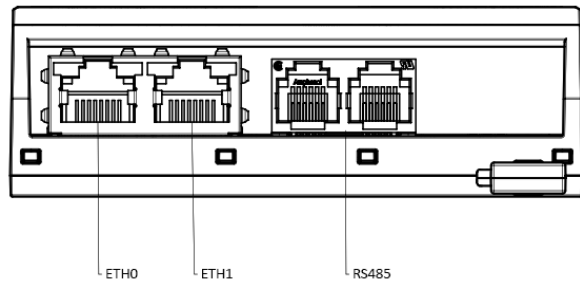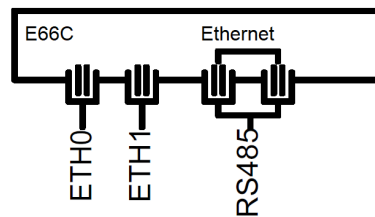

**Ethernet interfaces**

**SELV, reinforced insulation, OVC III**

Type RJ-45 socket

Pin assignment

|  |   |          |
|--|---|----------|
|  | 1 | TxD+     |
|  | 2 | TxD-     |
|  | 3 | RxD+     |
|  | 4 | Not used |
|  | 5 | Not used |
|  | 6 | RxD-     |
|  | 7 | Not used |
|  | 8 | Not used |

**All Ethernet interfaces**

|                      |                |
|----------------------|----------------|
| Technology           | 10/100-BASE-TX |
| Duplex               | half or full   |
| MDI/MDIX             | auto           |
| Maximum cable length | up to 100 m    |

**Configurable Ethernet interfaces**

ETH0 and ETH1 are independently configurable


**Network bridging**

Number of devices in bridging mode      tested up to 20

**RS-485 interface****SELV, reinforced insulation, OVC III**

Type      twin jack RJ-12

**Pin assignment**
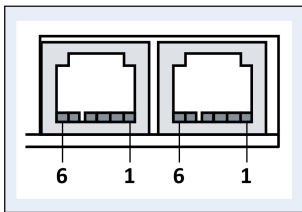
|   |   |                   |
|---|---|-------------------|
|  | 1 | C (common ground) |
|   | 2 | Data A            |
|   | 3 | Data B            |
|   | 4 | Data B            |
|   | 5 | Data A            |
|   | 6 | C (common ground) |

**Characteristics**

Symmetrical, serial, asynchronous, half-duplex interface (master or slave depending on parameterisation)

Maximum number of slaves      31

Standard format      8N1

Maximum transmission rate      1 Mbaud

Maximum line length

- Up to 250 m at max. 57.6 kbps, max. 31 slaves

- Up to 550 m at max. 38.4 kbps, max. 31 slaves

- Up to 1000 m at max. 19.2 kbps, max. 15 slaves

**Antenna connection (E66C Cat 1/GPRS, Cat M1/NB1)****SELV, reinforced insulation, OVC III**

Type      female SMA socket

Tear-off strength      &lt; 100 N

**Optical interface****Optical interface**

Service access to the E660 base meter

Electrical-physical properties according to IEC 62056-21

Type      serial, asynchronous, half-duplex

Max. transmission rate      38,400 bps

Protocols      DLMS/COSEM

**LED indicators****LED CON**

Indication of data traffic      green and red

**LED PWR/ERR**

Indication of operating status      green and red

**Configuration switches****Dip switches**

Position 1      bus termination enable

Position 2      bus bias enable

Position 3      bus bias enable

Position 4      not used

**Environmental influences****Temperature range      according to IEC 62052-11**

Operation E66C ETH      -40 °C to +70 °C

Operation E66C Cat 1, Cat M1/NB1      -40 °C to +60 °C

Storage E66C (all variants)      -40 °C to +85 °C

**Insulation strength to meter****Insulation strength**

4 kV at 50 Hz for 1 min

**Product safety****According to IEC 60721-3-3 and IEC 61010-1**

Extended environmental conditions      3K6

Pollution degree      2

**Material****Housing material**

Polycarbonate, partly glass-fibre reinforced

Flame resistant

Interlock: Polyoxymethylene (POM)

**Weight and dimensions****Weight**

180 g


**Dimensions**

Width      96 mm


Height      120.4 mm

Depth      31.7 mm

## Dimensions (front/right side/back/top)

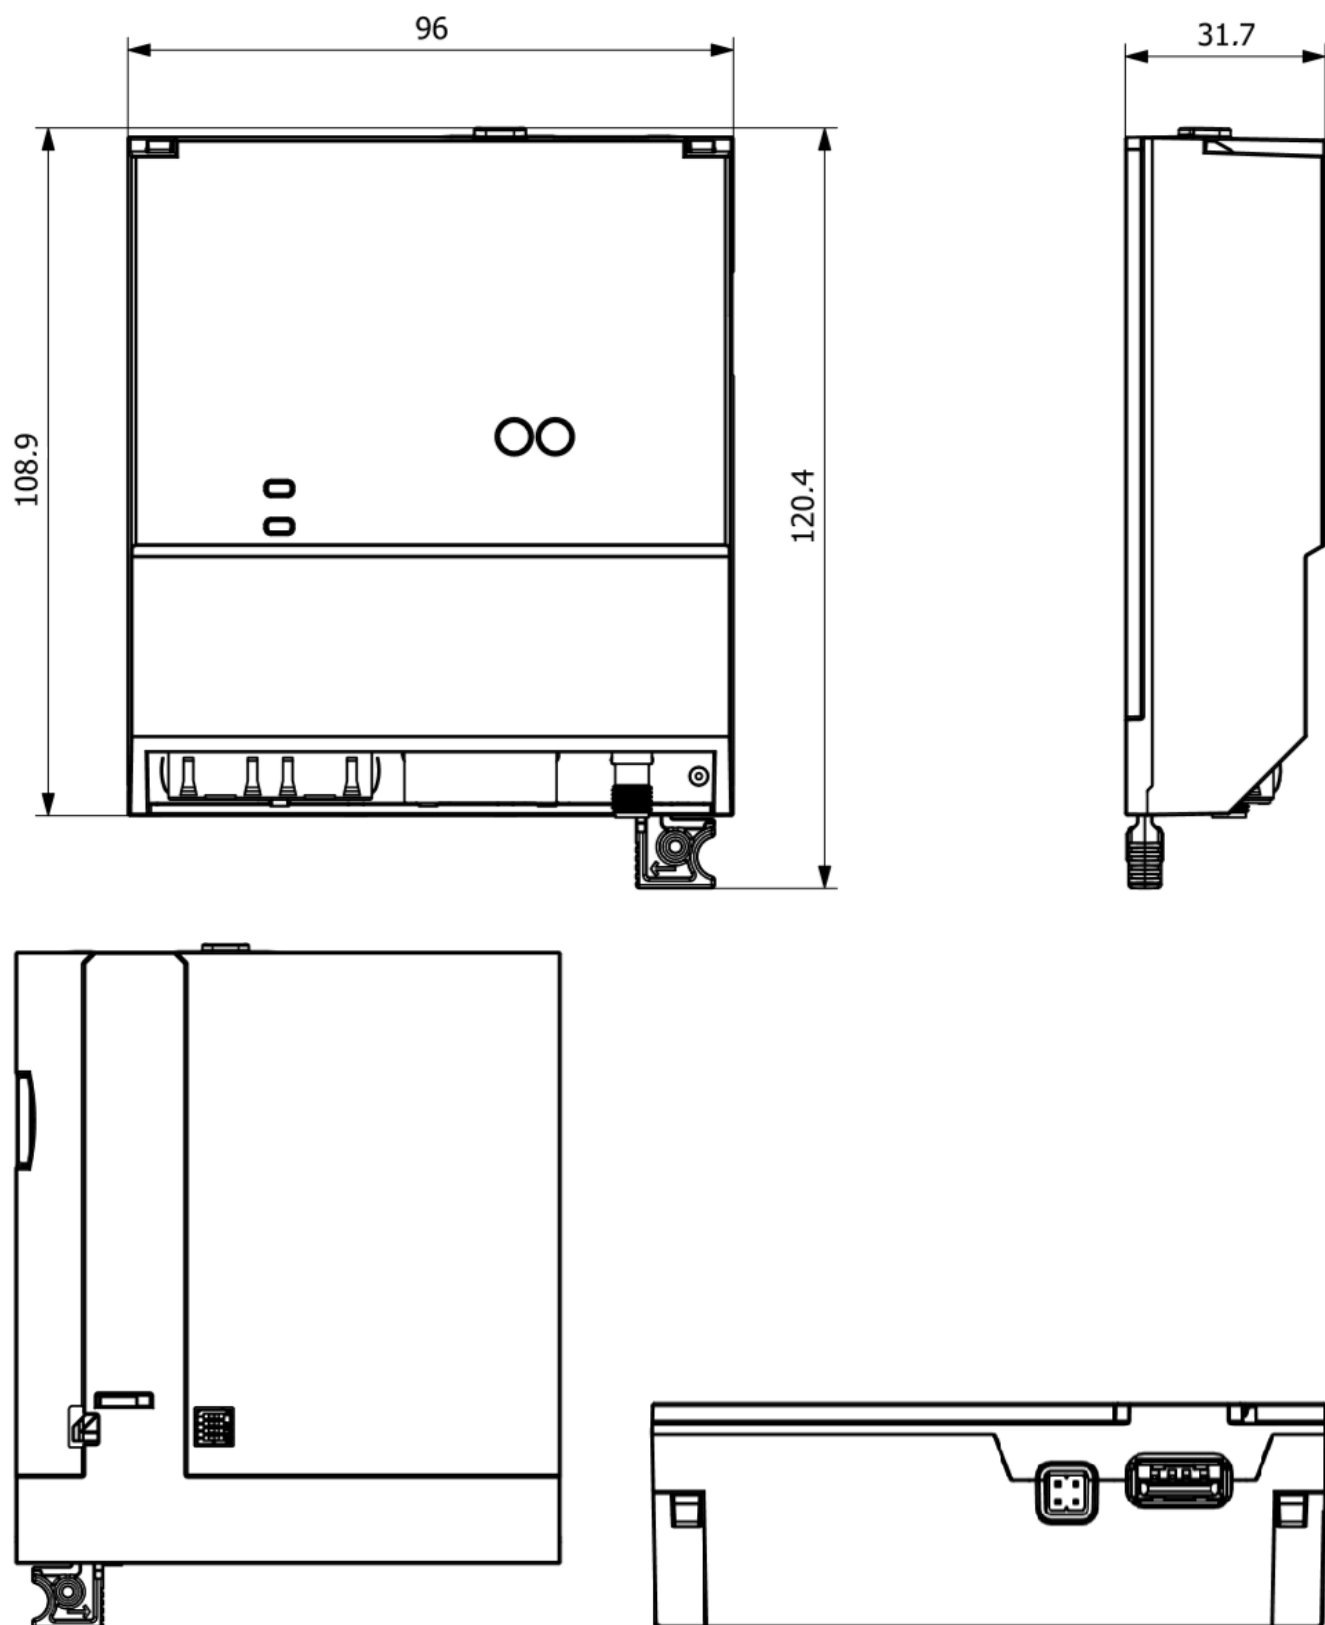

**Typical application diagram**

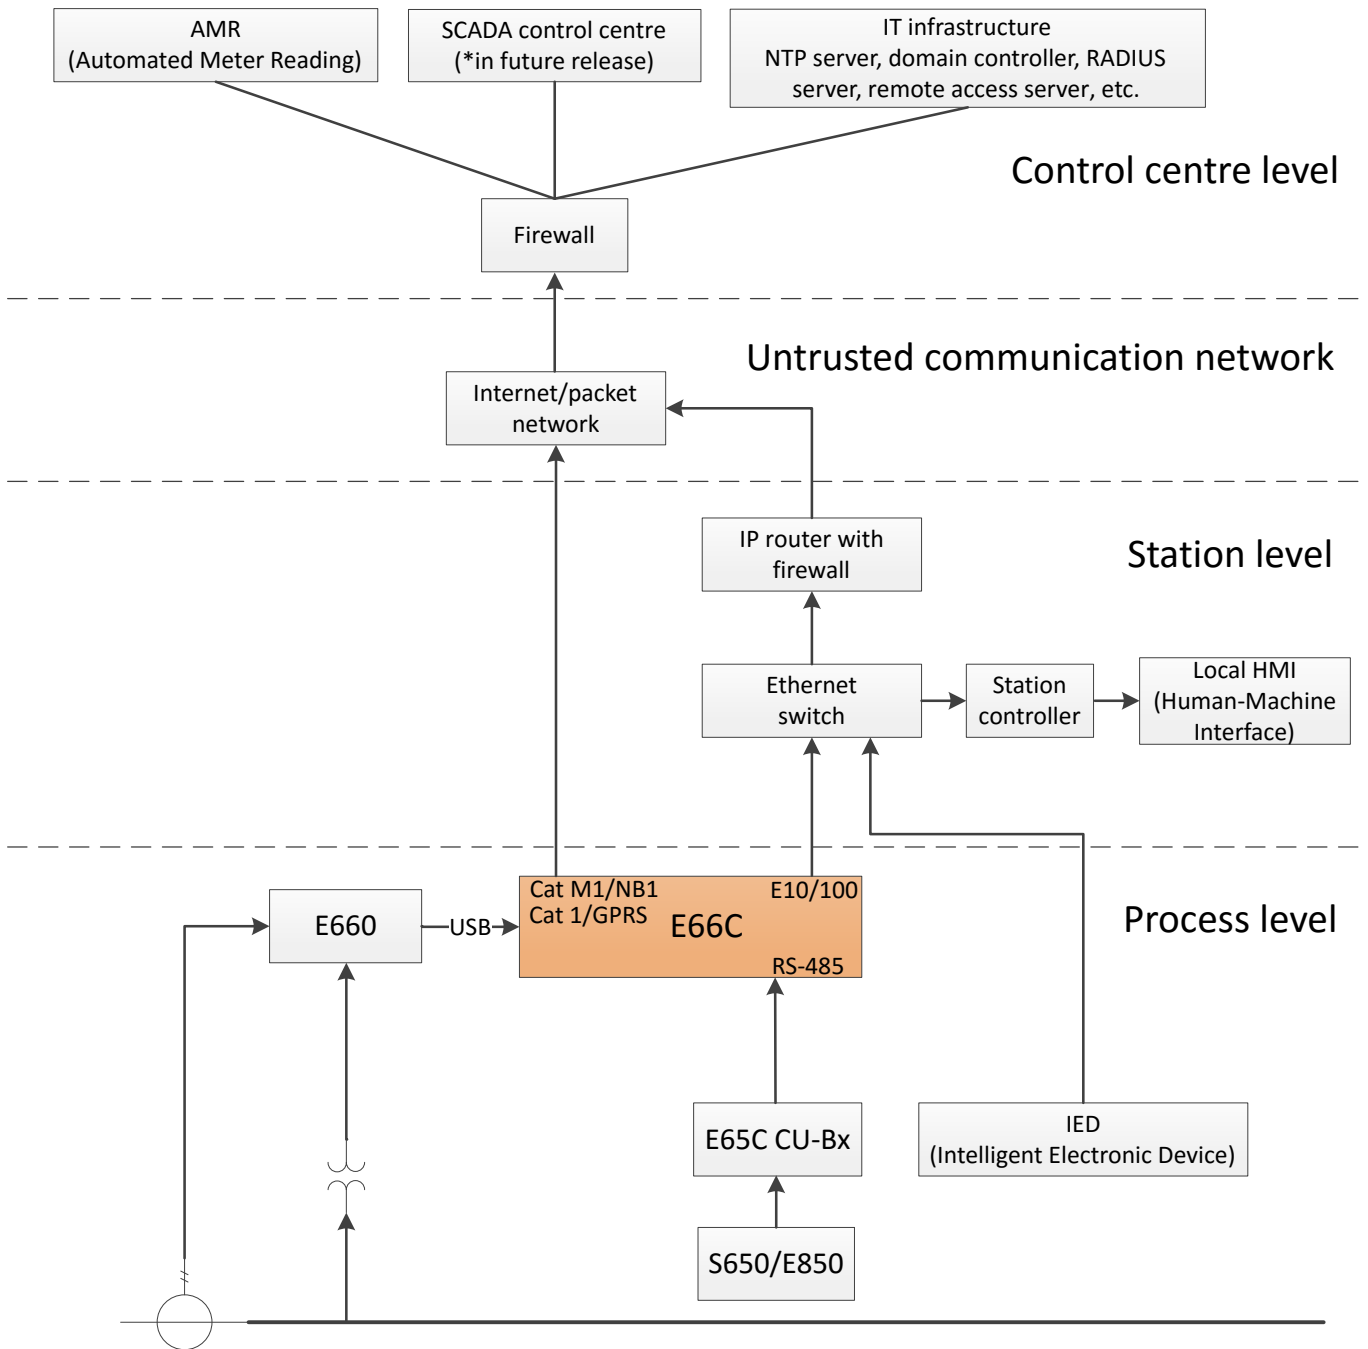

## Type designation

| Example                             | E66C - | 1X - | LEFE - | FE00 - | OPRS - | 00 |
|-------------------------------------|--------|------|--------|--------|--------|----|
| <b>Brand name and segment</b>       |        |      |        |        |        |    |
| E66C Communication module           |        |      |        |        |        |    |
| <b>Product generation</b>           |        |      |        |        |        |    |
| 1X First generation                 |        |      |        |        |        |    |
| 2X Second generation                |        |      |        |        |        |    |
| <b>Primary interface type WAN</b>   |        |      |        |        |        |    |
| 00 None                             |        |      |        |        |        |    |
| LE LTE Cat M1 for listed bands      |        |      |        |        |        |    |
| LF LTE Cat 1 with GPRS fallback     |        |      |        |        |        |    |
| FE Fast Ethernet                    |        |      |        |        |        |    |
| <b>Secondary interface type LAN</b> |        |      |        |        |        |    |
| FE Fast Ethernet                    |        |      |        |        |        |    |
| 00                                  |        |      |        |        |        |    |
| <b>Legacy interface</b>             |        |      |        |        |        |    |
| OP Optical interface                |        |      |        |        |        |    |
| RS RS-485                           |        |      |        |        |        |    |
| <b>Reserved</b>                     |        |      |        |        |        |    |
| 00                                  |        |      |        |        |        |    |



PAGE INTENTIONALLY LEFT BLANK

**Contact:**

Landis+Gyr AG

Alte Steinhäuserstrasse 18

CH-6330 Cham

Switzerland

Phone: +41 41 935 6000

[www.landisgyr.com](http://www.landisgyr.com)